


## PTFE Ball Valve

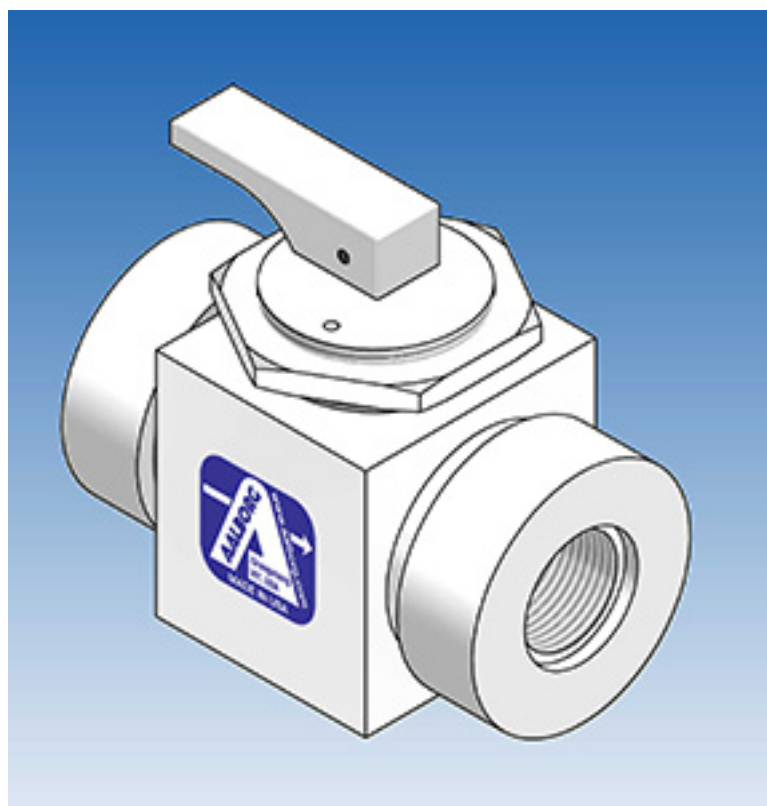

AALBORG® Instruments is pleased to announce the addition of the newly designed two-way PTFE Ball Valve to its product line. This manually operated on-off valve is made of PTFE wetted parts and Polypropylene structural components.

- Target corrosive and ultra-pure fluid applications in laboratories and industrial processing applications
- Inlet and outlet ports are 1" Female NPT
- CV value of 30
- Maximum operating temperature at 70°C (157°F)
- Maximum operating pressure is 4.1 bar (60 psig)
- Open-Close Position is 1/4 Turn

[www.aalborg.com](http://www.aalborg.com) [1]

**Source URL (retrieved on 02/01/2015 - 6:14pm):**

[http://www.chem.info/product-releases/2013/08/ptfe-ball-valve?qt-most\\_popular=0](http://www.chem.info/product-releases/2013/08/ptfe-ball-valve?qt-most_popular=0)

### Links:

[1] <http://www.aalborg.com/>